

**Features**

- 2.8W LED Dot Starion 3W
- Aluminium housing with plastic cover
- RGB and mono color of 3000K, 4000K and 6500K with 120° beam angles
- IP67 rated and UV resistant
- DMX512 control system and TTL controller

**Highlights**

- Optional frosted dome cover or Diamond cut clear cover
- Backlit for billboards, signage and advertisement light boxes
- Fully-customizable solution for creative and demanding media projects
- Flexible mounting capability for challenging surfaces
- Field installation friendly and cost effective


**Technical Specifications**

Product Name		AC-AZ5-DA-BxNAFO	AC-AZ5-DA-BxBAFO	AC-AZ5-DA-BxCAFO	AC-AZ5-DA-BxGAFO
Picture/ display	Brightness	-	240lm	240lm	240lm
	LED type	SMD	SMD	SMD	SMD
	Beam angle	120°	120°	120°	120°
	Color	RGB	3000K	4000K	6500K
Environmental	Operating temperature	-35°C to +50°C	-35°C to +50°C	-35°C to +50°C	-35°C to +50°C
	Operating humidity range	0% - 90% RH	0% - 90% RH	0% - 90% RH	0% - 90% RH
	Ingress protection	IP67	IP67	IP67	IP67
	LED lifetime	50,000 hrs	50,000 hrs	50,000 hrs	50,000 hrs
Power	Mains input	24VDC	24VDC	24VDC	24VDC
	Power consumption maximum	2.8W	2.8W	2.8W	2.8W
Physical	Housing	Aluminium	Aluminium	Aluminium	Aluminium
	Cover (optional)	Plastic	Plastic	Plastic	Plastic
	Dimension	62 (dia.) x 18 (H)mm	62 (dia.) x 18 (H)mm	62 (dia.) x 18 (H)mm	62 (dia.) x 18 (H)mm
	Weight (g)	96g	96g	96g	96g
Control	Control system	DMX512	DMX512/ Standard	DMX512/ Standard	DMX512/ Standard

All specifications are subjected to change without notice.


Technical Drawing

Unit : mm

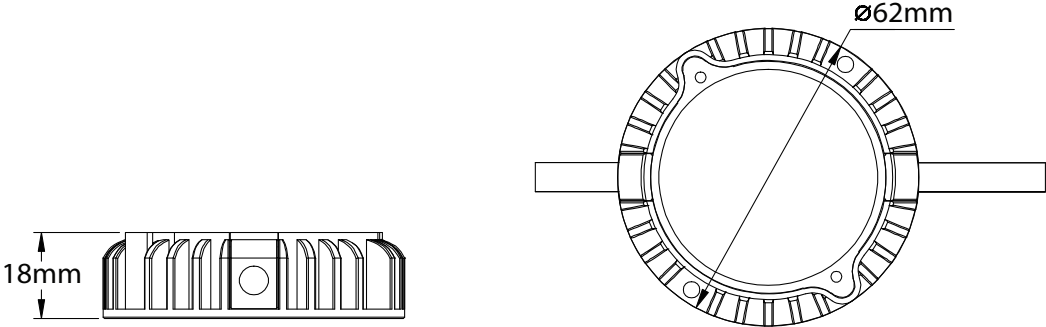

Tolerance for dimensions = ± 2.5mm

Accessories - Frosted Dome Cover

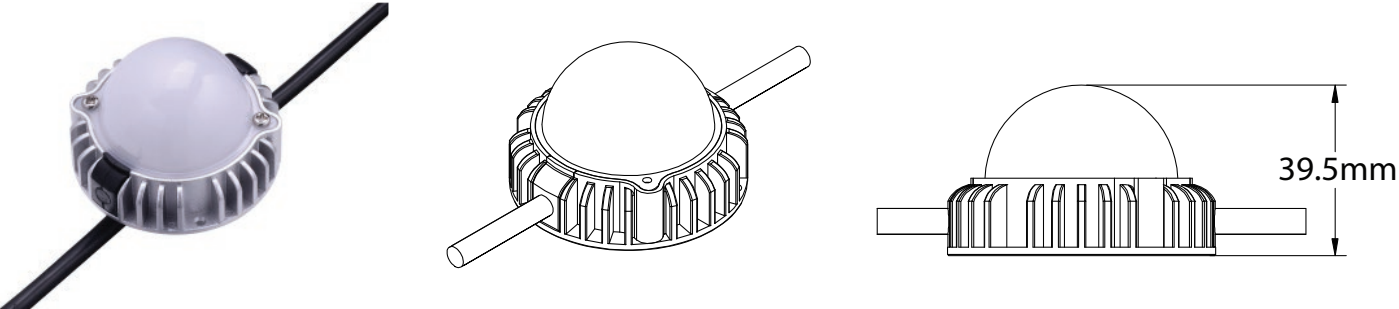

Tolerance for dimensions = ± 2.5mm

All specifications are subjected to change without notice.