


Features

- System power : 20W, 36W & 48W
- 1000 meter in length with aluminium housing and tempered glass cover
- Mono colors & RGB/RGBW color with round and oval beam angles
- DMX512 control system to achieve gradual, transition, blinking and other dynamic effects

Highlights

- High brightness with robust design
- Excellent heat dissipation
- Flexible base for angle adjustment
- Field installation friendly
- Cost effective

Technical Drawing

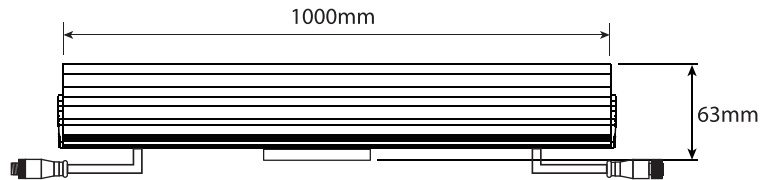

Tolerance: ±2.5mm

Technical Specifications

Article Number		AA-ACx-WT-BCyAz0*	
Product	LED type	SMD LED	
	Beam angle	(Round)	12°/ 35°/ 60°
		(Oval)	10°x60°/ 30°x60°
	Color	2700K/ 3000K/ 4000K/ 5700K/ RGB/RGBW	
Environmental	Operating temperature	-35°C - 45°C	
	Operating humidity range	10 - 90% RH	
	Ingress protection	IP66	
	LED lifetime	50,000hrs	
Power	Mains input	24VDC	
	Power consumption maximum	20W/36W/48W	
Physical	Housing	Aluminium	
	Cover	Tempered glass	
	Dimensions (L x W x H)	1000mm x 50mm x 63mm	
Control	Control system	DMX512/ standard	

* Options :
 x : Power wattage y : Color z : Beam angle
 a= 20W, K= 36W T= 2700K, U= 3000K, V= 4000K, Z= 5700K 3= 12°, a= 35°, H= 60°
 E= 48W N= RGB, 2= RGBW E= 10°x60°, 4=30°x60°