

# LED WEATHER-PROOF FITTING MARINE-C

The new weather proof range of light battens are an ideal solution for indoor and outdoor applications. The solid exterior and high transmittance, low glare diffuser provides great performance and light distribution for all kind of applications. It is suitable for both ceiling and wall mounting.

## AREAS OF APPLICATION:

- Airport, Transit terminal
- Direct replacement for batten luminaires with fluorescent lamps
- Wide spectrum of applications
- Factory, assembly lines
- Hypermarkets
- Warehouses
- Carpark
- Clean room (Class 100 - 100K)


## HIGHLIGHTS

- LED Light Source (Osram/Samsung/Epistar)
- LED Life Span at 50K Hours (L80B10)
- Dimmable (0-10V & DALI) function is optional
- Instant-on light
- Easy installation and maintenance
- Complies with IEC 60598
- IP65
- Class 1


## CERTIFICATIONS

- CE
- RoHS

## RADIATION PATTERN



## TECHNICAL DRAWING

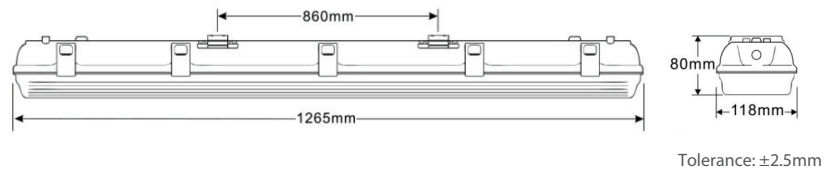

## TECHNICAL SPECIFICATIONS

| Power | CCT   | Beam Angle | Light Output | Optics  | CRI | Dimmable     | Dimensions (H x W x T mm) | Voltage  | Art.-No.         |
|-------|-------|------------|--------------|---------|-----|--------------|---------------------------|----------|------------------|
| 20W   | 4000K | 120°       | 2000lm       | Frosted | 80  | NON-DIMMABLE | 1270 x 118 x 80           | 220-240V | HF-WA-CEF-LHAHCA |
| 20W   | 6500K | 120°       | 2000lm       | Frosted | 80  | NON-DIMMABLE | 1270 x 118 x 80           | 220-240V | HF-WA-CEF-LGAHCA |
| 40W   | 4000K | 120°       | 4000lm       | Frosted | 80  | NON-DIMMABLE | 1270 x 118 x 80           | 220-240V | HF-WA-CEH-LHAHCA |
| 40W   | 6500K | 120°       | 4000lm       | Frosted | 80  | NON-DIMMABLE | 1270 x 118 x 80           | 220-240V | HF-WA-CEH-LGAHCA |

### Note :

All measurement datas are subjected to 10% tolerance due to measurement equipment tolerance and accuracy  
All product specifications are subject to change without prior notice