

# LED PANELED DE

LED PANELED DE 40W adopts qualified super bright LED as light source, it provides a commitment of stable, long life and no UV and IR emission. The frame is designed to be modern and stylish, while the high quality frosted cover is used for efficient light diffusion.

LED PANELED DE 40W is the ideal replacement for traditional grid lights and fluorescent tubes. It creates excellent light that conventional light will never achieve. It is suitable to be installed in hospital, offices, schools and warehouses.



## SPECIFICATIONS


- Power :40W
- Beam Angles : 120°
- CCT : 3000K, 4000K & 6000K
- CRI : 80
- IP Rating : IP20
- Will not fade colors, avoids inventory spoilage
- Low heat emission, compact dimensions
- Rapid amortization

## HIGHLIGHTS

- Flicker free driver
- High reduction in power consumption
- Instant-on light
- Environmental friendly – free of mercury and hazardous materials
- Easy and various installation styles

## CERTIFICATIONS

- CE
- RoHS

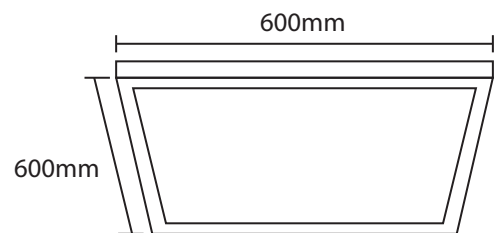

## Technical Specifications

Power	CCT	Beam Angle	Light Output	Optics	CRI	Dimmable	Dimensions (H x W x T mm)	Voltage	Versions	Driver	Body Color	Art.-No.
40W	3000K	120°	3400lm	FROST	80	NO	600X600X30	220-240V	STEP DOWN FRAME	Flicker Free	WHITE	HC-PD-YCL-NCAKBF
40W	4000K	120°	3600lm	FROST	80	NO	600X600X30	220-240V	STEP DOWN FRAME	Flicker Free	WHITE	HC-PD-YCL-NDAKBF
40W	6000K	120°	3600lm	FROST	80	NO	600X600X30	220-240V	STEP DOWN FRAME	Flicker Free	WHITE	HC-PD-YCL-NRAKBF

\* Instant light up < 1 second.

\* Not suitable for accent lighting.

\* All measurement data subjected to 10% tolerance due to measurement equipment tolerance and accuracy.

\* Lumen maintenance factor : L70

\*\* Product specification subjects to change without prior notice.