

# LED DOWNLIGHT WELLUX SQUARE

LED DOWNLIGHT WELLUX SQUARE comes in various wattages and sizes to choose from and suitable to be used in various applications. It is a surface mounted downlight and it can be perfectly installed to any ceilings.

LED DOWNLIGHT WELLUX SQUARE is designed for easy installation to save labour cost. It can be installed with just few easy steps. Wellux is suitable to be installed in hallways, shopping malls, restaurants and supermarkets.



## Features


- Power : 10W, 20W, 30W & 40W
- Beam Angles : 20° & 45°
- CCT :3000K, 4000K & 6500K
- Housing Color : White & Black
- IP Rating : IP20

## HIGHLIGHTS

- Easy installation
- Excellent energy saving compared to traditional light source
- Average rated lifespan of 50,000 hours
- Environmentally friendly and durable quality
- Instant-On light

## CERTIFICATIONS

- CE
- RoHS

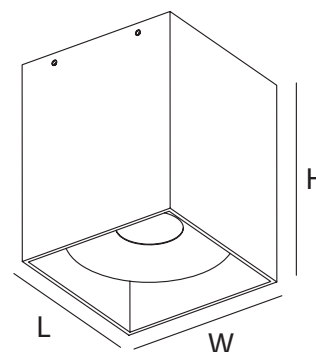

## TECHNICAL SPECIFICATIONS

System Power	Module Power	CCT*	Beam Angles*	Light Output	IP	CRI	Voltage	Power Factor	Dimension (LxWxH)	Article Number
10W	9W	3000K/4000K/6500K	20°/45°	1000lm	20	80	220-240V	>0.9	90 x90 x 95mm	LC-DF-DcC-BxCyBz
20W	18W	3000K/4000K/6500K	20°/45°	2000lm	20	80	220-240V	>0.9	110 x110 x 120mm	LC-DF-JP2-BxCyBz
30W	27W	3000K/4000K/6500K	20°/45°	3000lm	20	80	220-240V	>0.9	130 x130 x 135mm	LC-DF-1dP-BxCyBz
40W	36W	3000K/4000K/6500K	20°/45°	4000lm	20	80	220-240V	>0.9	160 x160 x 165mm	LC-DF-FYL-BxCyBz

### Options

x : CCT	y : Beam Angle	z : Housing Color
C= 3000K	b=20°	D=Black
D= 4000K	J=45°	F=White
F= 6500K		

\* All specifications are subjected to change without notice.