


LED PANELED XG

LED PANELED XG provides an economical, easy-to-install upgrade from linear fluorescent lighting to a long-lasting and energy-efficient LED solution. The contemporary center lens design delivers a soft natural glow with even illumination and minimized glare making it an attractive general-purpose ambient lighting solution.

PANELED XG bring a stylish and economical lighting solution to all commercial, educational, medical, and retail applications.

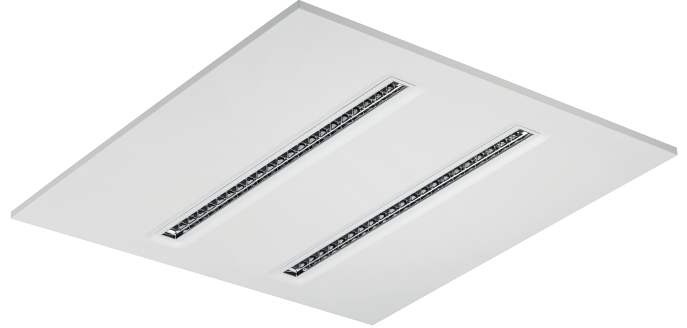

SPECIFICATIONS


- Power : 30W, 40W & 60W
- Beam Angles : 80° X 70°
- CCT : 3000K, 4000K & 6500K
- CRI : 80
- Dimming function available upon request
- Will not fade colors, avoids inventory spoilage
- Low heat emission, compact dimensions

HIGHLIGHTS

- High reduction in power consumption
- Environmental friendly – free of mercury and hazardous materials
- Instant-on light
- Easy and various installation styles

CERTIFICATIONS

- CE
- RoHS

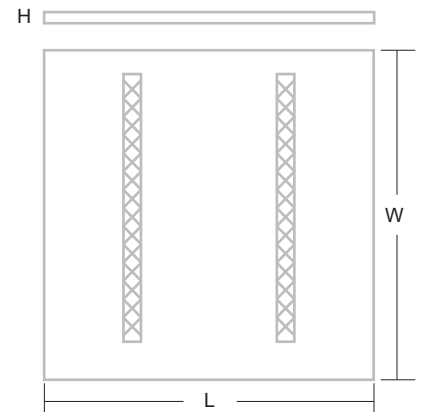

Tolerance: $\pm 2.5\text{mm}$

Technical Specifications

Power	CCT	Beam Angle	Light Output	Optics	CRI	Dimmable	Dimensions (H x W x T mm)	Voltage	UGR	Body Color	Art.-No.
30W	3000K	80x70°	3000lm	CLEAR	80	NON-DIMMABLE	595 x 595 x 38	220-240V	<22	WHITE	HC-PC-NKP-BCALBF
30W	4000K	80x70°	3600lm	CLEAR	80	NON-DIMMABLE	595 x 595 x 38	220-240V	<22	WHITE	HC-PC-NKP-BDALBF
30W	6500K	80x70°	3600lm	CLEAR	80	NON-DIMMABLE	595 x 595 x 38	220-240V	<22	WHITE	HC-PC-NKP-BFALBF
40W	3000K	80x70°	4000lm	CLEAR	80	NON-DIMMABLE	595 x 595 x 38	220-240V	<22	WHITE	HC-PC-NKL-BCALBF
40W	4000K	80x70°	4800lm	CLEAR	80	NON-DIMMABLE	595 x 595 x 38	220-240V	<22	WHITE	HC-PC-NKL-BDALBF
40W	6500K	80x70°	4800lm	CLEAR	80	NON-DIMMABLE	595 x 595 x 38	220-240V	<22	WHITE	HC-PC-NKL-BFALBF
30W	3000K	80x70°	3000lm	CLEAR	80	NON-DIMMABLE	295 x 1195 x 38	220-240V	<22	WHITE	HC-PC-RLP-BCALBF
30W	4000K	80x70°	3600lm	CLEAR	80	NON-DIMMABLE	295 x 1195 x 38	220-240V	<22	WHITE	HC-PC-RLP-BDALBF
30W	6500K	80x70°	3600lm	CLEAR	80	NON-DIMMABLE	295 x 1195 x 38	220-240V	<22	WHITE	HC-PC-RLP-BFALBF
60W	3000K	80x70°	6000lm	CLEAR	80	NON-DIMMABLE	595 x 1195 x 38	220-240V	<22	WHITE	HC-PC-NLP-BCALBF
60W	4000K	80x70°	7500lm	CLEAR	80	NON-DIMMABLE	595 x 1195 x 38	220-240V	<22	WHITE	HC-PC-NLP-BDALBF
60W	6500K	80x70°	7500lm	CLEAR	80	NON-DIMMABLE	595 x 1195 x 38	220-240V	<22	WHITE	HC-PC-NLP-BFALBF

* All measurement data subjected to 10% tolerance due to measurement equipment tolerance and accuracy

** Product specification subjects to change without prior notice.