


**Features**

- System power : 12W & 18W
- Input voltage: 200-240V
- Aluminium housing made by high grade material
- IP65 & IK10
- Triac dimmable and color changeable functions are available

**Applications**

- Stairway
- Corridor
- Garden compound wall
- Balconies

**Technical Drawing**

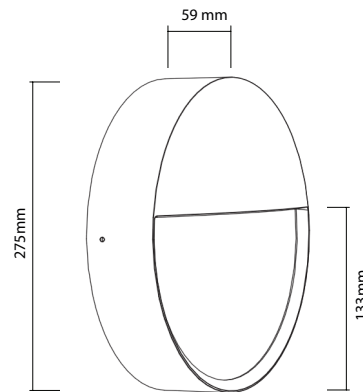

**Technical Specifications**

Tolerance: ±2.5mm

Article Number		WL-LAGOONR-12	WL-LAGOONR-18
Product	Lumen output	1000lm	1500lm
	Beam angle	110°	110°
	Color	3000K/4000K/6500K	3000K/4000K/6500K
Environmental	Operating temperature	-30°C To 45°C	-30°C To 45°C
	Operating humidity range	10 - 90% RH	10 - 90% RH
	Ingress protection	IP65	IP65
	LED lifetime	50,000hrs	50,000hrs
Power	Mains input	200-240VAC	200-240VAC
	Power consumption maximum	12W	18W
Physical	Housing	Aluminium	Aluminium
	Cover	PC	PC
	Dimensions (D x T)	275mm x 59mm	275mm x 59mm
	Type Base	Surface Mounted	Surface Mounted
Control	Control system	ON-OFF / Dimmable / Color Changeable	ON-OFF / Dimmable / Color Changeable